



Solar inverters | DC Fast Chargers | AC chargers

Single Phase Solar Inverters

Lagao Aur Bhool Jao

Install Once, Save Forever.

2500+
Installations

WHY ZENERGIZE?



Metal Body

Built to last, not to crack



Highest Efficiency

Only inverter powered by
SiC Mosfets



Smart & Secure

All data hosted on Indian
Servers only.



Screenless by Design

Fewer Failures. More Uptime



Quick & Easy Installation

Configure via mobile app
within 15 mins



Pan India Support

First Response < 1 hour




✉ contact@zenergize.in

🌐 www.zenergize.in

☎ +91 99587 88932


Technical Data	GTSI-2K2-1P	GTSI-3K3-1P	GTSI-4K0-1P	GTSI-5K0-1P	GTSI-6K0-1P
Maximum Power at STC	2.9kWp	4.5kWp	5.3kWp	6.6kWp	7.0kWp
Dimensions (H X W X D in mm)	285 x 250 x 135	350 x 300 x 200	350 x 300 x 200	350 x 300 x 200	350 x 300 x 200
Weight (kg)	9	10	12	14	16
Operating PV Input Voltage Range	50-420 V				
PV Short Circuit Current	22 A				
Nominal Output Voltage Range	240 Vac (192 - 264 V) (Trip time - 2.0s)				
Operating Temperature	-25 ° C to 55 ° C				
Protection	IP65, Integrated Type-III SPD (Both AC and DC side), Anti-Islanding Protection, Output Over Current Protection, Output Short Circuit Protection, Grid Over Voltage Protection				

Intelligence Enabled by ZenSense

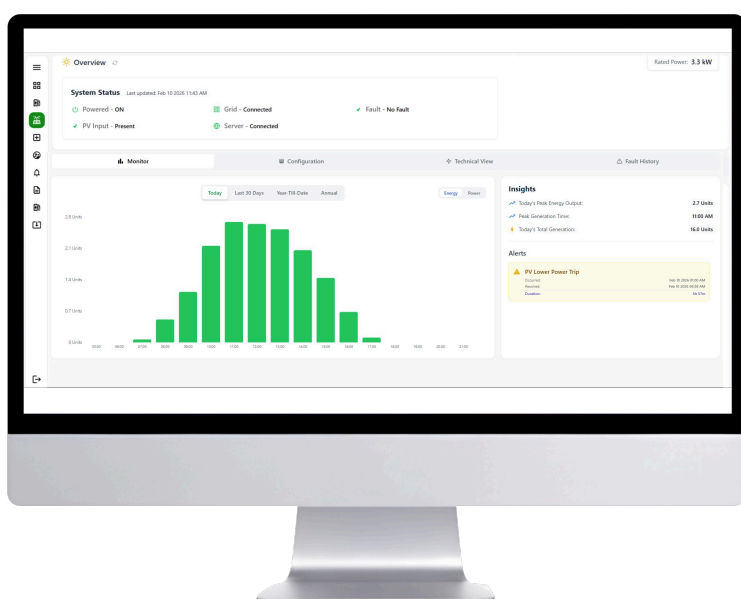

ZenSense: Complete Visibility, Total Control

Monitor what matters and get real-time insights to optimize without limits.
One platform. Infinite possibilities.

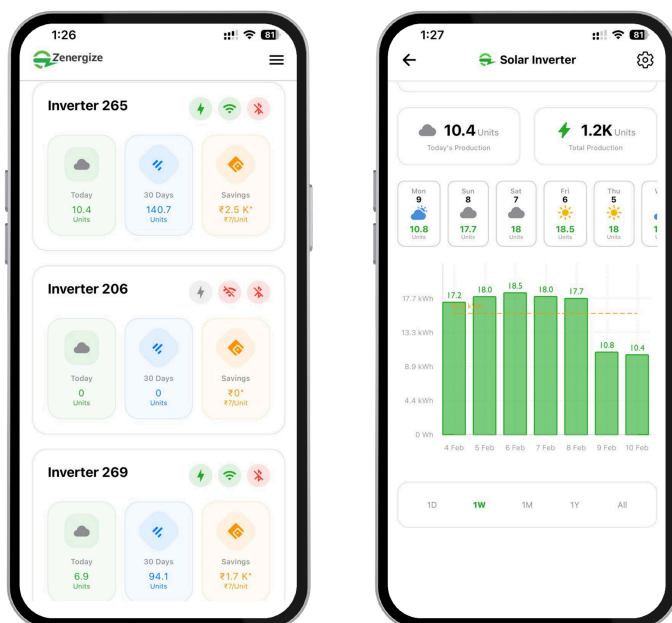

Your devices, your data, always within reach



Scan this QR code to download the Zennergize app